

## LED LANDSCAPE FIXTURE



### Specifications

Item	- 33963A
Model	- LED BULLET FIXTURE 8W/3K
Bulb Type	- LED
Beam Spread	- 60°
Input Voltage	- 120 - 277V (60 Hz)
Watts	- 8W
Finish	- Dark Bronze
Diameter	- 4" (101mm)
Length	- 7.25" (184.15mm)
Color Temp	- 3000K
CRI	- 80
Lumen	- 500
Operating Temp	- -22°F to 104°F (-30°C to 40°C)
Dimmable	- No
Location Rating	- Suitable for Wet Location
Power Factor	- >=0.9 PF
Average Life Hours	- 50,000

### Caution

1. Wear gloves and safety glasses at all times when removing luminaire from carton, installing, servicing or performing maintenance.
2. Avoid direct eye exposure to the light source.
3. Account for small parts and destroy packaging material as they may be hazardous to children.
4. Keep combustible and other materials that can burn away from the luminaire and lamp/lens.
5. Min 90°C (194°F) Supply Conductors.

### Precaución

1. Use guantes y gafas de seguridad en todo momento cuando retire la luminaria de la caja, la instale, realice el mantenimiento o realice tareas de mantenimiento.
2. Evite la exposición directa de los ojos a la fuente de luz.
3. Tenga en cuenta las piezas pequeñas y destruya el material de embalaje, ya que pueden ser peligrosos para los niños.
4. Mantenga combustibles y otros materiales que puedan quemarse lejos de la luminaria y la lámpara / lente.
5. Conductores de suministro de 90 ° C (194 ° F) como mínimo.

# LED LANDSCAPE FIXTURE

## **⚠ WARNING**

1. Risk of electric shock.
2. Turn off the power when you perform any maintenance.
3. Verify that supply voltage is correct by comparing it with the luminaire label information.
4. Make all electrical and grounded connections in accordance with the National Electrical Code and any applicable code requirements.
5. All wiring connections should be capped with UL approved wire connectors.


## **⚠ ADVERTENCIA**

1. Riesgo de descarga eléctrica.
2. Apague la alimentación cuando realice cualquier tipo de mantenimiento.
3. Verifique que la tensión de alimentación sea correcta comparándola con la información de la etiqueta de la luminaria.
4. Realice todas las conexiones eléctricas y con conexión a tierra de acuerdo con el Código Eléctrico Nacional y cualquier requisito de código aplicable.
5. Todas las conexiones de cableado deben estar tapadas con conectores de cable aprobados por UL.

## Installation

### MOUNTING INSTRUCTION


1. Inspect components to ensure that male and female port threads and sealing are free of burrs, nicks and scratches or any foreign material.
2. Thread fixture into cover plate (sold separately) or ground stake (sold separately) as shown.
3. Using two wrenches, hold fitting at desired aiming angle and tighten locknut without exceeding the rated torque value of 350 in. lbs.
4. Inspect to ensure that the washer is seated flat on the mounting surface.
5. Connect power to fixture referencing wiring diagram. Make sure the power supply is disconnected before installing.
6. Supply power to the fixture.

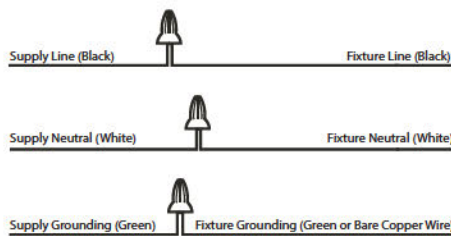

### Operating Characteristics

Voltage Input: 120-277V (60Hz)

Operating Temperature: -30°C to 40°C (-22°F to 104°F)

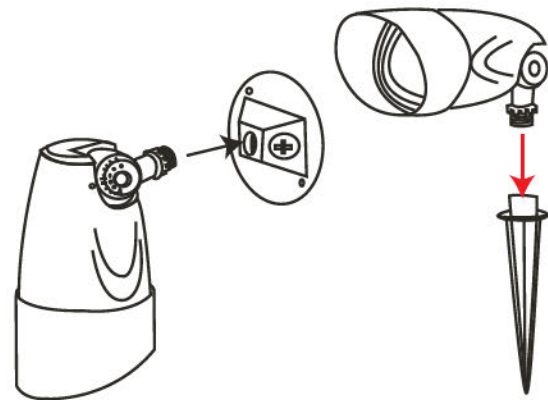

### CLEANING AND MAINTENANCE

Caution: Be sure fixture temperature is cool enough to touch. Do not clean or perform maintenance while fixture is energized.

1. Clean lens & fixture with non-abrasive cleaning solution.
2. Do not open fixture to clean the LED. Do not touch the LED.
3. Keep leaves and other debris out of hood.