

LED Fluorescent Retrofit

- 50,000 Avg Life Hours
- Bypass
- 2200 Initial Lumens
- G13 Base Type
- T8 Bulb Shape
- 120 - 277 V 50/60 Hz

LED17-18T8/841-850/4FT/BP



31169K	LED18T8/841/4FT/BP	18W	41K	2200 Lumens
31169L	LED18T8/850/4FT/BP	18W	50K	2200 Lumens


- LONG LIFE
- ENERGY EFFICIENT
- ROHS COMPLIANT
- NO MERCURY NO LEAD
- ZERO UV DYE AND PIGMENT FADE
- 4100K/6500K 82 CRI.
- UL/DLC CERT BP.

- 48 IN. NOMINAL LENGTH.
- NOT FOR OUTDOOR USE.
- MIN. AMBIENT OPERATING TEMP. -4°F. -20°C.
- MAX. AMBIENT OPERATING TEMP. 104°F. 40°C.
- BP FOR USE WITH NON SHUNTED SOCKETS

BYPASS REPLACEMENT INSTRUCTION

Mounting - Electronic Ballast

For Use With Non Shunted Socket

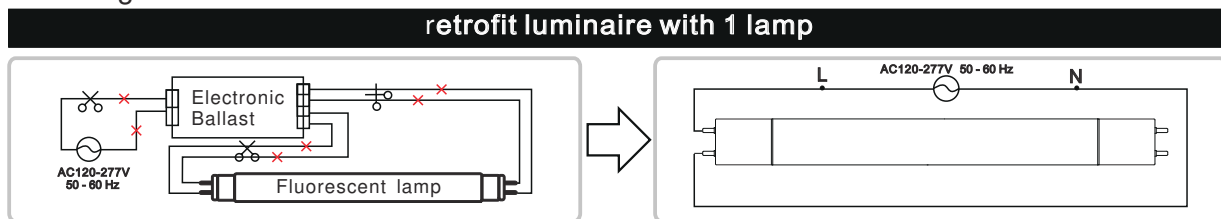

Mounting - Magnetic Ballast

For Use With Non Shunted Socket

