


FEATURES AND SPECIFICATIONS

DIMENSIONS



23.625" (600.08mm)

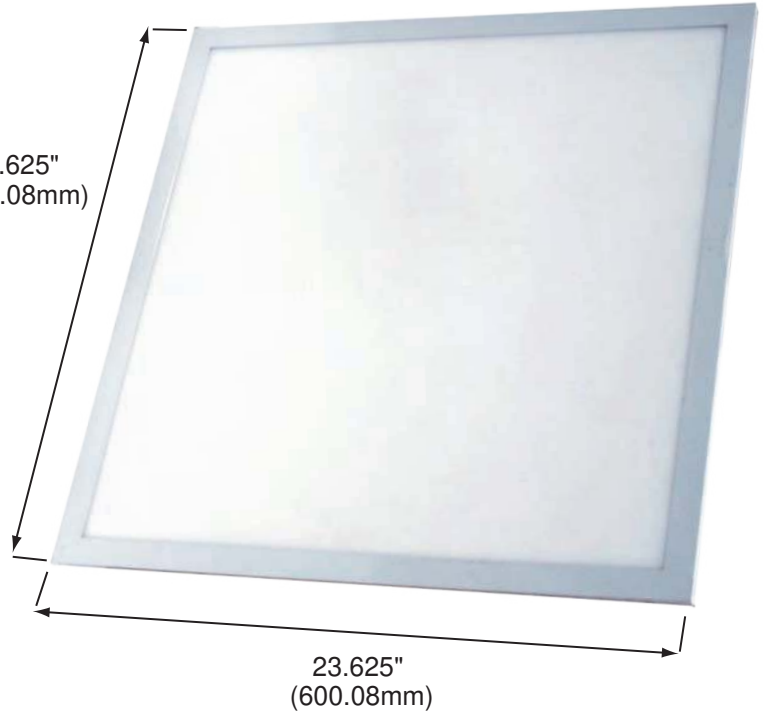

Overall Length: 23.625" (600.08mm)

Width: 23.625" (600.08mm)


Height: 0.5" (12.70mm)

Weight: 12.0 lb. (5.44 kg.)

Shatter Resistant Low Glare Plastic Diffuser
Dry or damp indoor locations and applications

This fixture is warranted to be free of defects in materials and workmanship for a period of five years from the date of the original purchase

PHOTOMETRICS


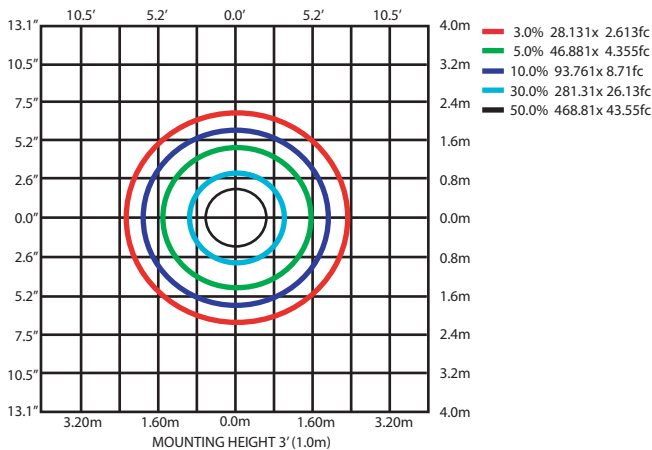


MOUNTING DETAILS


1. Compare the fitting bag with components list.
2. Compare with the specification as follows to determine if the ceiling meets installation requirements.

SPEC	Size/mm	External size of T-channel/mm	Internal size of T-channel/mm	N.W./Kg
30120	300+1(L) 1210+1(W)	280+1(L) 1190+1(W)	303+1(L) 1213+1(W)	4
	6060	600+1(L) 600+1(W)	580+1(L) 580+1(W)	
60120	600+1(L) 1210+1(W)	580+1(L) 1190+1(W)	603+1(L) 1213+1(W)	7.5


3. Remove the ceiling tile.



4. Tilt the lamp front down 30-45° and place into the ceiling channel.



5. Check that the lamp has been fixed in the ceiling channel.



33175D LED30WUNV/5K



Wattage: 30W
CCT: 5000K
CRI: 80
Avg Life Hrs: 50,000
Avg Lumens: 2550
Voltage: 100-277V
Hertz: 50/60Hz

DAMAR®

805 N Carnation
Aurora, MO 65605
Made in China