


DAMAR®

Model: 31032A

SJTW 100' TEMP STRING LITE

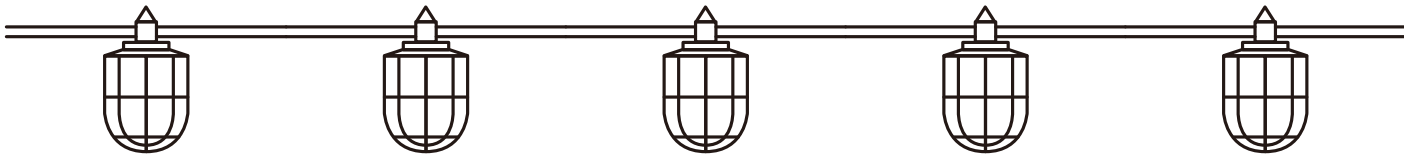

INSTALLING/REPLACING LIGHT BULBS

⚠️WARNING

TO PREVENT SERIOUS INJURY: Unplug the String Light from its electrical outlet and allow it to cool before performing any procedure in this section.

Do not replace light bulbs during rain or when wet.

1. Unscrew existing bulbs carefully, they should be tight to keep moisture out.

Note: Suitable for Wet Location Use.

3. Replace with medium base light bulbs. Screw each bulb into socket clockwise until top of socket forms a tight seal around the light bulb and bulb makes solid contact with socket. Suitable for Incandescent, CFL, LED or CCL light bulbs.
Incorrectly installed bulbs will not seal correctly and can cause injury or death from electric shock.
2. Carefully consider the number of strings and the total wattage when selecting bulb wattage, refer to following chart.
Do not exceed 1875 watts, all Strings combined.

Bulb Wattage	Maximum Number of 10 Bulb 1875 Watt String Lights
40	4
60	3
75	2
100	1
150	1

Figure A: Maximum String Light Length

Note: Attachment hardware, such as hooks or nylon cable ties, is sold separately.

1. If a guide wire is not used, connect **every bulb holder** securely to structure.

2. If attaching to guide wire, attach the ring at the back of **every bulb holder** to the guide wire using a S-hook or cable tie (sold separately).
3. **BEFORE EACH USE**, inspect the general condition of the tool. Check for:
 - loose hardware,
 - damaged cord/electrical wiring,
 - cracked or broken parts, and
 - any other condition that may affect its safe operation.

DAMAR®

805 N Carnation
Aurora, MO 65605
Made in China

READ ALL INSTRUCTIONS



Read the ENTIRE IMPORTANT SAFETY INSTRUCTIONS section at the beginning of this manual including all text under subheadings therein before set up or use of this product.



WARNING: When using outdoor use portable luminaires, basic safety precautions should always be followed to reduce the risk of fire, electric shock, and personal injury, including the following...

1. To reduce the risk of fire, use 150 Watt or smaller, medium base, type a (A21, A23, A19).

2. To reduce the risk of electric shock, only use self-ballasted lamps with this product if a self-ballasted lamp type is identified on the lampholder or tag.

3. To reduce the risk of electric shock and fire, do not exceed marked lampholder wattage or string maximum wattage including any additional string loads.

4. To reduce the risk of electric shock do not connect or disconnect when wet.

5. For use only on GFCI protected circuits.

6. The receptacle cover should always be in place to prevent the entry of water (unless a plug is inserted).

7. Unplug all String Lights, and allow bulbs to cool completely before mounting, taking down, changing light bulbs, or otherwise servicing lamps or bulbs.

8. Install only according to instructions. Incorrect or inadequate installation can cause serious injury from electric shock, fire, or other hazards.

9. Install only with bulbs facing downward.

10. Install with the String Light stretched out, do not group the bulbs.

11. Do not install within an enclosed space or overhang, such as a soffit, ceiling, or cabinet. Do not allow bulbs to contact or rest on anything. Keep bulbs at least 3 inches from other objects.
12. Do not modify or cut any part of this light. Do not use if any part of this light has been cut or modified.

13. Do not hang using screws, nails, staples, or any other sharp fastener that may pierce, abrade, or otherwise damage the insulation.

14. Inspect all parts and mounting points of the light periodically. Do not use if parts are weakened, discolored, brittle, or otherwise degraded, damaged, or worn. Immediately unplug the String Light, take it down after the bulbs have cooled, and dispose of it.

15. Do not exceed 1875 maximum wattage for all String Lights combined.

16. Keep proper footing and balance at all times during installation.

17. People with pacemakers should consult their physician(s) before use. Electromagnetic fields in close proximity to heart pacemaker could cause pacemaker interference or pacemaker failure.

18. Use as intended only.

19. Maintain labels and nameplates on the String Light. These carry important safety information. If unreadable or missing, contact for a replacement.

20. The warnings, precautions, and instructions discussed in this instruction manual cannot cover all possible conditions and situations that may occur. It must be understood by the operator that common sense and caution are factors which cannot be built into this product, but must be supplied by the operator.



SAVE THESE INSTRUCTIONS.

DAMAR®

805 N Carnation
Aurora, MO 65605
Made in China