



DAMAR® Lighting



ITEM NO. 31927D
LED40T8/865/8FT/BP

- LED Fluorescent Retrofit
- 50,000 Avg Life Hours
- Bypass
- 4280 Initial Lumens
- FA8 Base Type
- T8 Bulb Shape
- 120 Degree Beam Spread
- 120-277V 50-60Hz

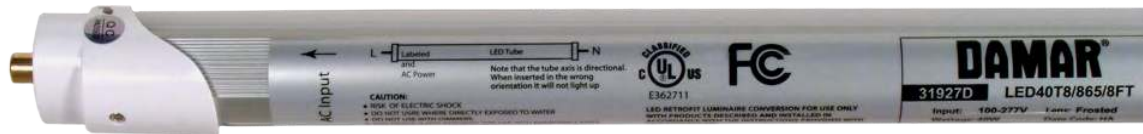


- LONG LIFE
- ENERGY EFFICIENT
- ROHS COMPLIANT
- NO MERCURY NO LEAD
- ZERO UV DYE AND PIGMENT FADE
- 6500K 83 CRI.
- UL CERT BYPASS

- 96 IN. NOMINAL LENGTH.
- NOT FOR OUTDOOR USE.
- MIN. AMBIENT OPERATING TEMP. -20°F. -4°C.
- MAX. AMBIENT OPERATING TEMP. 104°F. 40°C.
- FOR USE WITH NON-SHUNTED SOCKETS
- NOT FOR USE IN STANDARD FLUORESCENT LUMAIRES WITH BALLASTS OR STARTERS.

WARNING:

1. TO BE INSTALLED ONLY BY A LICENSED ELECTRICIAN.
2. TO BE INSTALLED AND USED ONLY IN ACCORDANCE WITH ALL APPROPRIATE ELECTRICAL CODES AND REGULATIONS.
3. NOT FOR USE WITH SHUNTED SOCKETS.
4. RISK OF ELECTRIC SHOCK! ALWAYS DISCONNECT POWER BEFORE INSTALLING OR REPLACING BULBS OR MODIFYING LUMINAIRE.
5. NOT FOR USE WITH DIMMERS.
6. NOT FOR USE WITH OR IN EMERGENCY LIGHT FIXTURES OR APPLICATIONS.
7. USE ONLY IN DRY INDOOR LOCATIONS AND APPLICATIONS.
8. FOR USE ONLY IN LUMAIRES CORRECTLY WIRED FOR LED LUMINAIRE TUBES TO PROVIDE THE RATED VOLTAGE SHOWN ABOVE.
9. NOT FOR USE IN STANDARD FLUORESCENT LUMAIRES WITH BALLASTS OR STARTERS.
10. PRIOR TO USE IN LUMINAIRE, APPROPRIATE MODIFICATIONS MUST BE MADE. SEE DIAGRAM ON RIGHT.

DO NOT USE WITH SHUNTED SOCKETS
CHECK SOCKETS BEFORE MODIFYING FIXTURE
REMOVE BALLAST AND STARTER PRIOR TO INSTALLATION

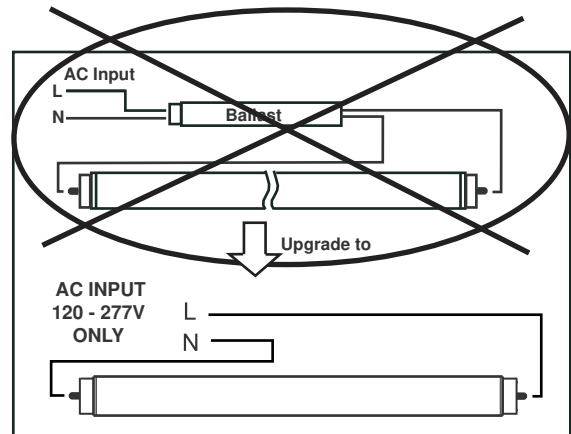

Phone: (800) 238-9080
Fax: (877) 608-0597

Damar Worldwide 4 LLC
805 N Carnation
Aurora, MO 65605

dwwsales@damarww.com
www.damarww.com