


FEATURES AND SPECIFICATIONS

DIMENSIONS




- Low Maintenance
- Enhanced One Piece Polycarbonate Housing
- Motion-sensor Mounting Option
- Operating Temperature -30°F to 122°F
- 50,000 Hours Rated Average Life
- IP 65/UL Wet Location Rated
- Limited Warranty: This fixture is warranted to be free of defects in materials and workmanship for a period of 5 years from the date of the original purchase.

PHOTOMETRICS

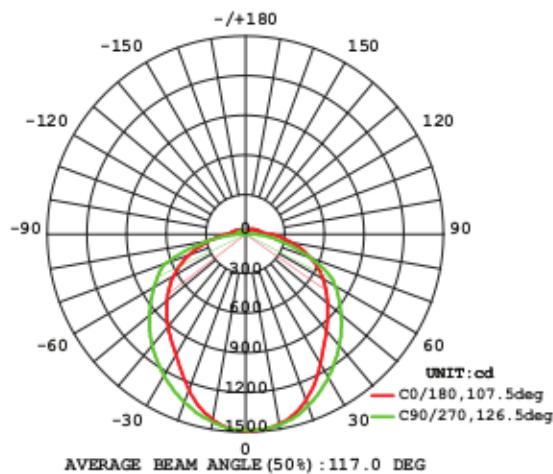

WIRING DETAILS

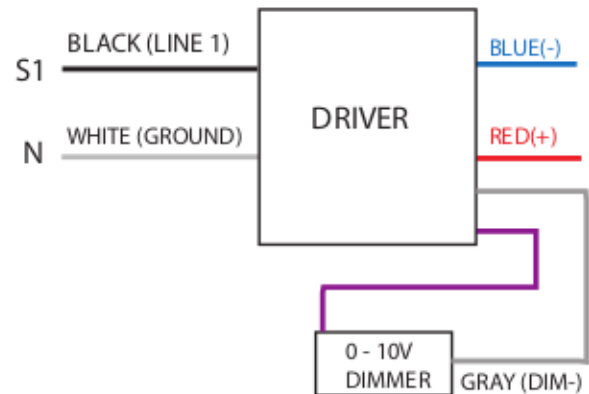

www.damar.com

33685A

LED WRAP 42
4K/4FT/DIM



Wattage : 42W
CCT: 4000K
CRI : 80
Avg Hours : 50,000
Avg Lumens : 4500
Voltage : 120-277V
Hertz: 50/60Hz



DAMAR®

805 N Carnation
Aurora, MO 65605
Made in China

DWA-42LED/4K/4FT WRAP FIXT

! WARNING

1. Ensure power is off before starting installation, wiring or attempting any maintenance should be performed by a person familiar with the construction and operation of the product and hazards involved to ensure personal safety.
2. All work should be performed by a qualified electrician.
3. The ceiling should have the enough strength for installing the fixture; Its endurance must be more than the weight of fixture.

Installation

1. Remove lens and wire way cover. Slide lens toward one end while lifting opposite end clear of fixture housing. If not clearing easily, ensure lens has slide past retainer clip inside the end cap.
2. Next squeeze both sides of wire cover until they clear metal tabs and remove cover.
3. Select wiring access point and remove appropriate knock.
4. Select installation point and locate studs.
5. For rear access points feed wires through hole.
6. Using 1" mounting screw or 3" x3/16 toggle bolts secure fixture in place using keyhole slots provided.
7. After making wiring connections, replace wire cover and diffuser into place
8. Restore power to branch circuit and energize the luminaire.

