

R[®] Lighting the World

LED UFO 100W/120W/150W 3CCT



Specifications

Item - 36052D

Model - LED UFO 100W/120W/150W 3CCT

Bulb Type - LED

Input Voltage - 120-277VAC 50/60Hz

Watts - 100W/120W/150W Selectable

Diameter - 11.02" (280mm)

Length - 6.50" (165mm)

Color Temp - 3000K/4000K/5000K Selectable

CRI - >80

Lumens - 14500/17400/21750

Power Factor - ≥0.9

Finish - Black

Dimmable - Yes, 0-10V

Wet Location - Yes

Surge Protection - 4KV

Life - 50,000

Beam Angle - 90°

Motion Sensor - Optional (36279E)

Note

Any alteration or modification of this product is expressly forbidden as it may cause serious personal injury, death, property damage and/or product malfuntion.

This luminaire is designed to operate in ambient temperatures ranging from −45°C to 45°C (−49°F to 113°F).

This product is not suitable for several special environments, such as places with corrosive gas liquids or high pressure water vapor. Suitable for wet locations.

Warning

PLEASE READ ALL INSTRUCTIONS BEFORE ATTEMPTING INSTALLATION

- This fixture must be wired in accordance with the national electrical code and applicable local codes and ordinances.
- Proper grounding is required to insure personal safety. Carefully observe the grounding procedure under installation section.
- All work should be done by a qualified electrician.
- Risk of electric shock Disconnect power at fuse or circuit breaker before installing or servicing.
- Risk of burn-Disconnect power and allow fixture to cool before servicing.
- Risk of personal injury Fixture may become damaged and/or unstable if not installed properly.
- Tighten all fixture components to their recommended torque values.








36052D



AR[®] Lighting the World

LED UFO 100W/120W/150W 3CCT


Installation

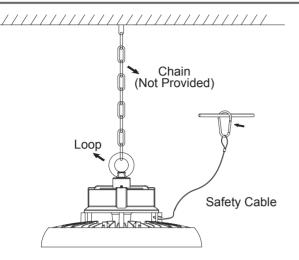

CEILING MOUNTING

- 1. Screw the loop into the fixture, tighten and secure it.
- 2. Hang the fixture on the ceiling chain.
- 3. Attach the safety cable.
- 4. After installation, connect the wires of the fixture to the mains according to local wiring rules, ensuring the connection is secure and protected.

Wattage & CCT Selectable Guidance

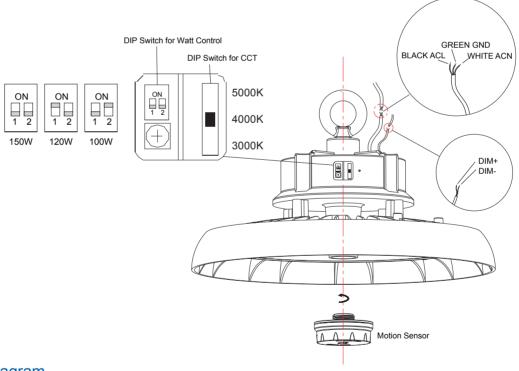

Wiring Diagram

