

### Specifications

Item	- 36153A
Model	- LED BARN LIGHT WATT/CCT SELECTABLE
Bulb Type	- LED
Watts	- 35/50/65 watts
Input Voltage	- 120-277VAC 50/60Hz
UL Rating	- Suitable for Wet Locations
Dimmable	- No
Height	- 4.4 inches (112.2mm)
Width	- 9.1 inches (230.5mm)
Length	- 12.6 inches (320.2mm)
Kelvin Color	- 3K/4K/5K
CRI	- 70
Photocell	- On/Off option
Lumens	- 5250-9750 lumens
Beam Angle	- 140 degrees
Ambient Operating Temp	- -4°F ~ 113°F (-20°C ~ 45°C)
Average Life Hours	- 50,000 hours



### Caution

- This fixture must be wired in accordance with the National Electrical Code (NEC) and applicable local ordinance. Proper grounding is required to ensure personal safety. Carefully observe grounding procedure under the installation section.
- Make certain power is OFF before starting the installation or attempting any maintenance. Risk of fire/electric shock. If not qualified, consult a licensed electrician.
- Disconnect power at fuse or circuit breaker before installing or servicing.
- RISK OF BURN - Disconnect power and allow the fixture to cool before servicing.
- RISK OF PERSONAL INJURY - Fixture may become damaged and/or unstable if not installed properly. Make sure all fixture components are securely tightened.

### Precaución

- Este accesorio debe estar conectado de acuerdo con el National Código Eléctrico (NEC) y ordenanzas locales aplicables. Apropiado Se requiere conexión a tierra para garantizar la seguridad personal. Cuidadosamente observe el procedimiento de conexión a tierra en la sección de instalación.
- Asegúrese de que la alimentación esté apagada antes de comenzar la instalación o intentando cualquier mantenimiento. Riesgo de incendio / descarga eléctrica. Si no calificado, consulte a un electricista con licencia.
- Desconecte la energía en el fusible o en el interruptor de circuito antes de instalar o servicio.
- RIESGO DE QUEMADURAS: desconecte la alimentación y permita que el dispositivo se enfríe antes de dar servicio
- RIESGO DE LESIONES PERSONALES: el accesorio puede dañarse y / o inestable si no se instala correctamente. Asegúrese de que todos los accesorios. Los componentes están bien apretados.




**NOTICE**

Any alteration or modification of this product is expressly forbidden as it may cause serious personal injury, death, property damage and/or product malfunction.


This luminaire is designed to operate in ambient temperatures ranging from -4°F ~ 113°F (-20°C ~ 45°C) and to be horizontally mounted with the LEDs facing down.

This product is not suitable for several special environments, such as places with corrosive gas liquids or high pressure water vapor.


**J-Box Installation**

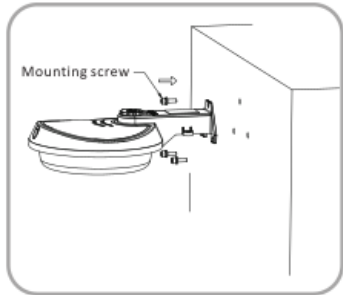

1. Mount the fixture to the wall via the mounting screws.

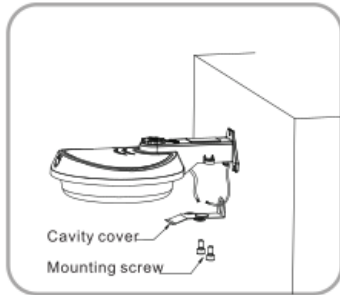


2. Complete wiring of the fixture by following the wiring diagram below and insert cavity cover.




3. Final installation


**Arm Mount Installation**

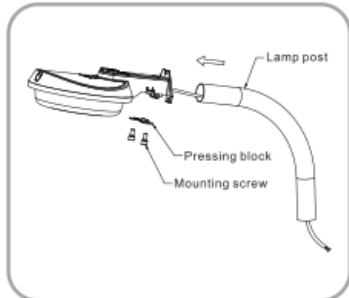

1. Run wiring through arm attachment and lock the pressing block

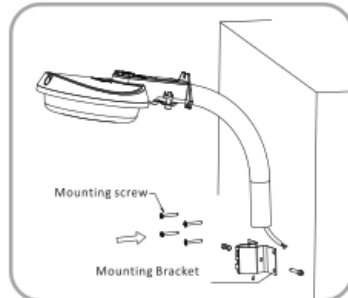


2. Insert arm attachment into mounting bracket and secure it with mounting screws.

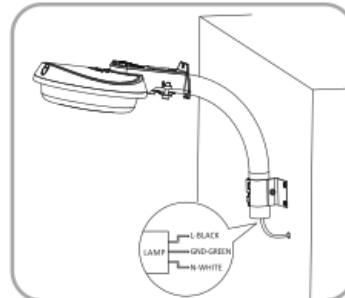


3. Connect wires per wiring diagram below.

**WATT/CCT SELECTABLE OPERATION**


1. Remove cover cap to reveal dip switch.



2. Toggle switch to desired wattage, CCT, and photocell operation




**Wiring Diagram**

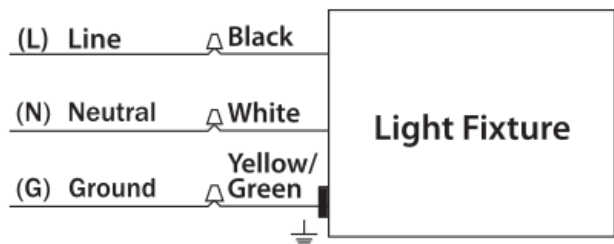


Wiring diagram

## ILLUMINANCE AT A DISTANCE CHARTS

### 35 WATT

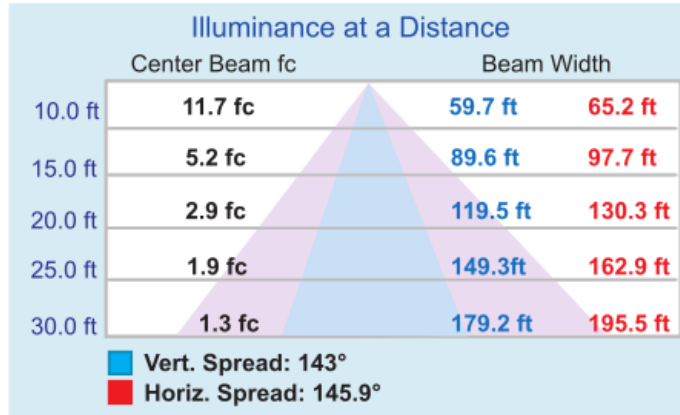

### 50 WATT

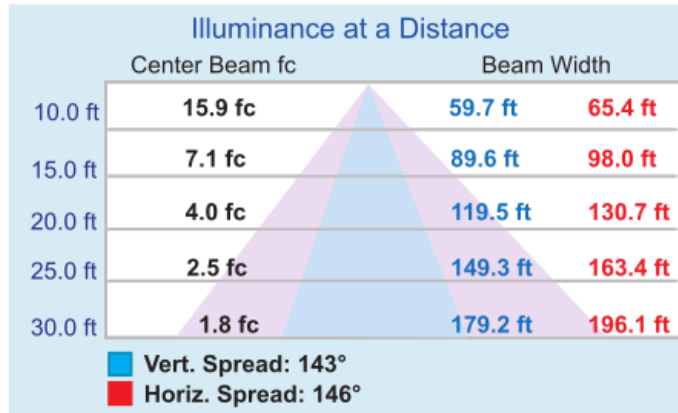

### 65 WATT

