

INSTALLATION INSTRUCTION

WARNING

Thank you for purchasing this product. To help ensure it gives complete satisfaction please install it according to these instructions and then pass the instructions to the appropriate person for retention and future reference.

- CONSULT A QUALIFIED ELECTRICIAN TO ENSURE CORRECT BRANCH CIRCUIT CONDUCTOR.
- CONSULTER UN ÉLECTRICIEN QUALIFIÉ POUR VOUS ASSURER QUE LES CONDUCTEURS DE LA DÉRIVATION SONT ADÉQUATS.
- MIN 75°C SUPPLY CONDUCTORS.
- LES FILS D'ALIMENTATION 75°C MIN.
- CAUTION-RISK OF FIRE
- ATTENTION-RISQUE D'INCENDIE
- CAUTION-RISK OF SHOCK
- ATTENTION-RISQUE DE CHOC



WIRING DIAGRAM




CAUTION: RISK OF INJURY

- Avoid eye exposure to the light source directly while it is on.
- Account for small parts and destroy packing material, as these may be hazardous to children.



MOUNTING

1. Open the two mounting screw covers located on the front edge of the fixture (A).
2. Close the mounting screw covers.

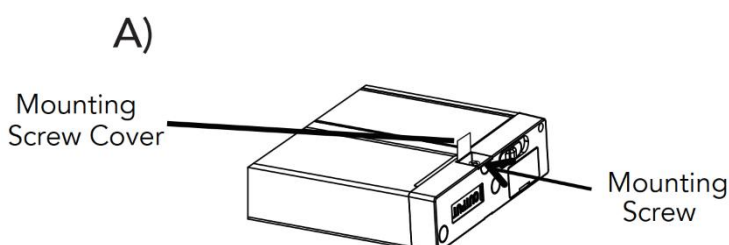

WIRING -OPTION #1: POWER CORD

1. Mount the fixture.
2. Remove the electrical port cover on the INPUT side.
3. Connect the optional power cable to the female port on the fixture.
4. Plug the power cable into a 120 volt socket.
5. Collect the excess power cord with zip ties or twist ties.

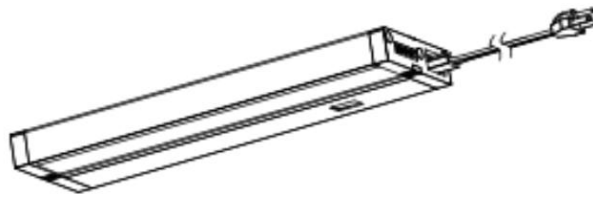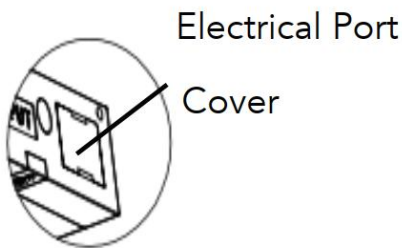

WIRING -OPTION #2: HARDWIRE THROUGH A JUNCTION BOX (JB-UL) SOLD SEPARATELY





WARNING

Risk of Fire or Electric Shock - Luminaire must be installed according to local electrical codes and requires knowledge of luminaire's electrical systems. If not qualified, do not attempt installation. Contact a qualified electrician.

1. Disconnect power from the breaker or fuse box.
2. Remove the electrical port cover from the INPUT end.
3. Connect the INPUT end of the provided end-to-end connector to the under cabinet fixture.
4. Connect the OUTPUT end of the end-to-end connector to the junction box.
5. Open the junction box and remove the most convenient of the three knockouts.
6. Mount the junction box and the fixture to the cabinet.
7. Attach the 3/8" die-cast connector to the junction box and pull wiring through it.
8. Connect wiring to the corresponding colored wires inside the box using wire nuts.
9. Close the junction box.

END-TO-END CONNECTOR

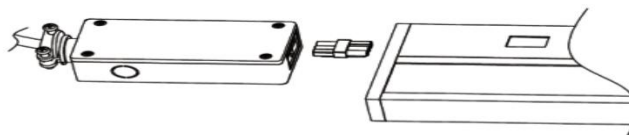

WIRING - OPTION #3: HARDWIRE DIRECT TO FIXTURE



WARNING

Risk of Fire or Electric Shock - Luminaire must be installed according to local electrical codes and requires knowledge of luminaire's electrical systems. If not qualified, do not attempt installation. Contact a qualified electrician.


1. Disconnect power from the breaker or fuse box.
2. Remove the most convenient of 3 knockouts and optional 3/8" die-cast connector.
3. Mount the fixture.

FRONT COVER

4. Open the front panel of the fixture to access the wiring by using a flat tool to pry open the compartment (A).
5. Insert the wiring from the power source through the connector and connect them to the corresponding wiring inside the fixture (B).

BLACK=Hot WHITE=Neutral GREEN=Ground

6. Ensure excess wires are settled inside the fixture.
7. Close the front cover.

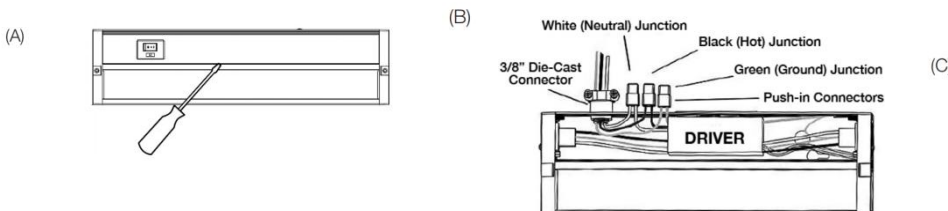


REAR ACCESS (C)

4. Remove the rear access panel by loosening the rear screw.
5. Insert the wiring from the power source through the connector and connect them to the corresponding wiring inside the fixture.

BLACK=Hot WHITE=Neutral GREEN=Ground

6. Ensure excess wires are settled inside the fixture.
7. Close the rear access panel.

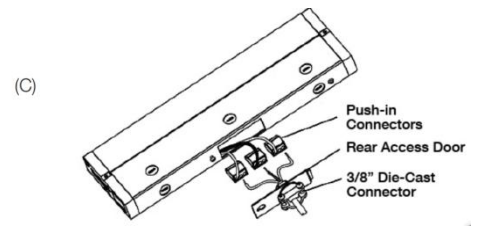

CONNECTING MULTIPLE FIXTURES


Cable SOLD SEPARATELY

1. Remove electrical port covers on the facing ends.
2. Connect the OUTPUT end of the cable to the OUTPUT of the first fixture.
3. Connect the INPUT end of the cable to the INPUT of the next fixture



End-to-End Connector (optional)

1. Remove electrical port covers on the facing ends of two fixtures.
2. Connect the OUTPUT side of the end-to-end connector to the OUTPUT of the first fixture.
3. Connect INPUT side of the end-to-end connectors to the INPUT of the next fixture.

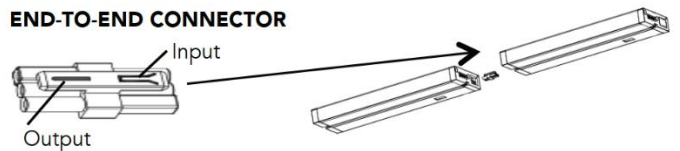

MODEL	MAXIMUM NO. FIXTURE IN SERIES
37133A	36pcs
37134A	22pcs