




Specifications

Item	- 36211A
Model	- LED SPORTS LIGHT 500W/5K
Wattage	- 500W
Input Voltage	- 120-277V 50/60Hz
Listings	- ETL Listed
Dimmable	- Yes (1-10V)
Diameter	- 18.11 inches (460mm)
Length	- 22.75 inches (578mm)
Operating Temp.	- -22°F to 122°F (-30°C to 50°C)
Color Temp	- 5000K
Finish	- Black
Lumens	- 62,500
Beam Angle	- 45°
Wet Location Rated	- Yes
EPA	- 1.14

Wiring Diagram

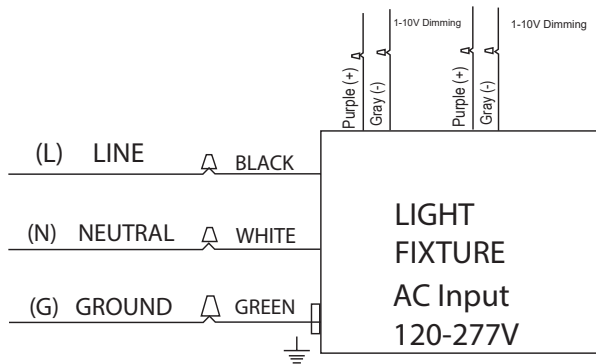

	Center Beam fc	Beam Width	
10.0 ft	1047.3 fc	8.8 ft	9.0 ft
15.0 ft	465.5 fc	13.2 ft	13.5 ft
20.0 ft	261.8 fc	17.6 ft	18.0 ft
25.0 ft	167.6 fc	21.9 ft	22.5 ft
30.0 ft	116.4 fc	26.3 ft	27.0 ft

■ Vert. Spread: 47.4°
■ Horiz. Spread: 48.4°

Caution

- This fixture must be wired in accordance with the National Electrical Code (NEC) and applicable local ordinance. Proper grounding is required to insure personal safety. Carefully observe grounding procedure under installation section.
- Make certain power is OFF before starting installation or attempting any maintenance. Risk of fire/electric shock. If not qualified, consult an electrician.
- Disconnect power at fuse or circuit breaker before installing or servicing
- RISK OF BURN - Disconnect power and allow fixture to cool before servicing.
- RISK OF PERSONAL INJURY - Fixture may become damaged and/or unstable if not installed properly. Tighten all fixture components to their recommended torque values.

Precaución

- Este accesorio debe estar conectado de acuerdo con el National Código Eléctrico (NEC) y ordenanzas locales aplicables. Apropiado Se requiere conexión a tierra para garantizar la seguridad personal. Cuidadosamente Observe el procedimiento de conexión a tierra en la sección de instalación.
- Asegúrese de que la alimentación esté apagada antes de comenzar la instalación o intentando cualquier mantenimiento. Riesgo de incendio / eléctrico choque. Si no está calificado, consulte a un electricista.
- Desconecte la corriente eléctrica o el disyuntor antes de instalación o servicio
- RIESGO DE QUEMADURAS: desconecte la alimentación y permita accesorio para enfriar antes de reparar
- RIESGO DE LESIONES PERSONALES: el accesorio puede dañarse y / o inestable si no se instala correctamente. Apriete todo el accesorio componentes a sus valores de par recomendados.

