


VAPORTIGHT 60W/80W/100W 5K



Specifications

Item	- 36780A
Model	- VAPORTIGHT 60W/80W/100W 5K
Bulb Type	- LED
Input Voltage	- 120-277 VAC 50/60Hz
Dimmable	- Yes (0-10V)
Watts	- 60/80/100
PF	- >0.9
Beamspread	- 110°
Color Temp	- 5000K
CRI	- 80
Lumen	- 9,600/12,800/16,000
Length	- 94.5" (2400.3 mm)
Width	- 5.0" (127 mm)
Height	- 4.0" (101.6 mm)
Average Life Hours	- 50,000
Location Rating	- Suitable for Wet Locations
Ambient Operating Temp	- -40°F to 122°F (-40°C to 50°C)
Surge Protection	- 4KV

WIRING DIAGRAM

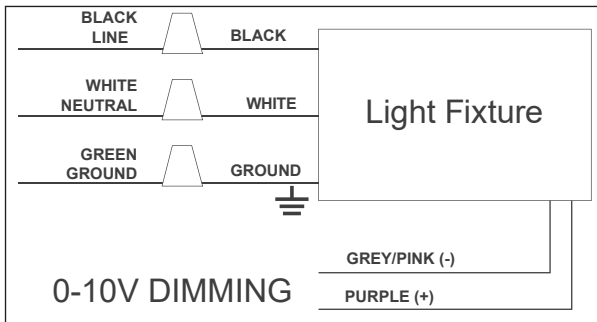

Caution

- This fixture must be wired in accordance with the National Electrical Code and applicable local ordinance. Proper grounding is required to insure personal safety. Carefully observe grounding procedure under installation section.
- Make certain power is OFF before starting installation or attempting any maintenance. Risk of fire/electric shock. If not qualified, consult an electrician.
- Disconnect power at fuse or circuit breaker before installing or servicing
- Risk OF BURN--Disconnect power and allow fixture to cool before servicing.
- RISK OF PERSONAL INJURY--Fixture may become damaged and/or unstable if not installed properly. Tighten all fixture components to their recommended torque values.

100 Watts

	Illuminance at a Distance		
	Center Beam fc	Beam Width	
10.0 ft	23.0 fc	28.1 ft	43.7 ft
15.0 ft	10.2 fc	42.1 ft	65.5 ft
20.0 ft	5.8fc	56.2 ft	87.3 ft
25.0 ft	3.7 fc	70.2ft	109.1ft
30.0 ft	2.6 fc	84.2 ft	131.0 ft

■ Vert. Spread: 109.1°
■ Horiz. Spread: 130.8°



Dimmable

