


## Specifications

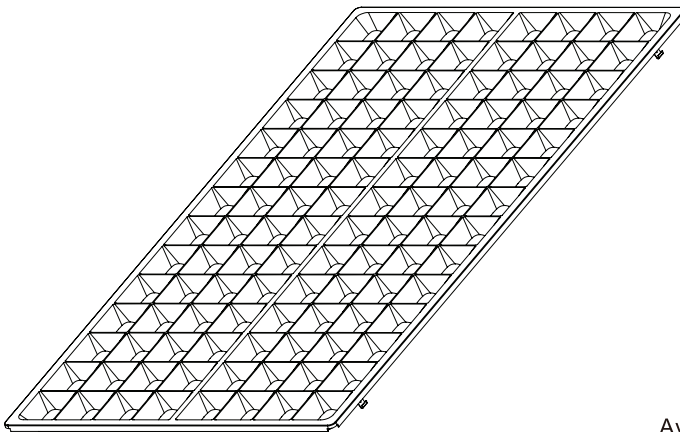

Item -	37341A
Model -	LED 2X4 HONEYCOMB PANEL 60W 5K
Bulb Type -	LED
Input Voltage -	120-277VAC 50/60Hz
Watts -	60W
PF -	> 0.9
UGR -	<19
Dimmable -	Yes, 0-10V
Beamspread -	100°
Color Temp -	5000K
CRI -	80
Lumen -	6600
Average Life Hours -	50000
Location Rating -	Dry/Damp
Ambient Operating Temp -	-13°F to 113°F (-25°C to 45°C)
Surge Protection -	1 KV
Length -	47.75 inches
Width -	23.75 inches
Height -	1.20 inches
	- Type IC

### Safety Precautions:

For your and others' safety, please read the precaution carefully before installation:

- (1). To avoid electric shock or component damage, disconnect power before attempting installation or servicing.
- (2). This product must be installed in accordance with the national electric code(NEC) and all applicable federal, state and local electric codes, and safety standards.
- (3). Please follow the correct installation instructions to install the product.
- (4). Do not use the product in wet locations.

**CAUTION:** More than one power supply present;

**ATTENTION:** presence de plusieurs alimentations électriques.


### Installation:

- (1). Turn off power at circuit breaker.
- (2). Put the troffer into the ceiling. (fig. 1)
- (3). Mount the troffer body hook to the keel in the right position. (fig. 3)
- (4). Attach fixture to conduit securely and make wiring connections  
(see wiring instructions below).(fig. 4)


This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.




**fig. 1**

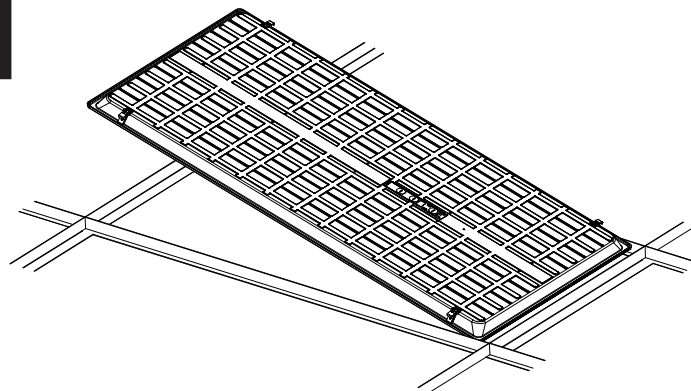

**fig. 2**

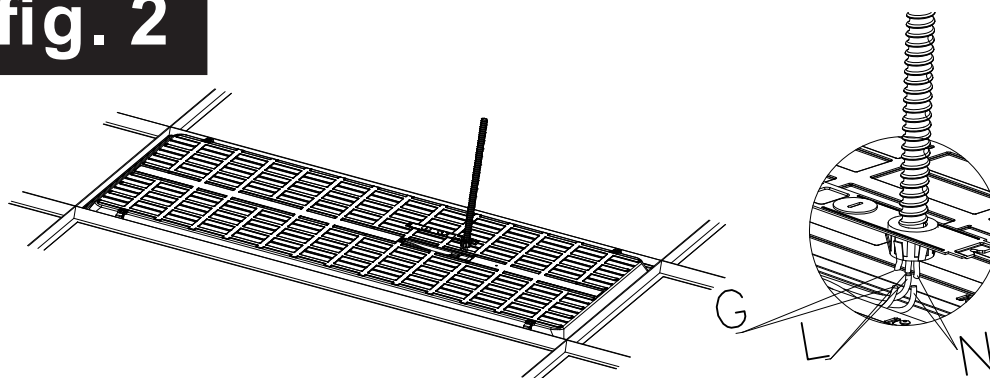

**fig. 3**

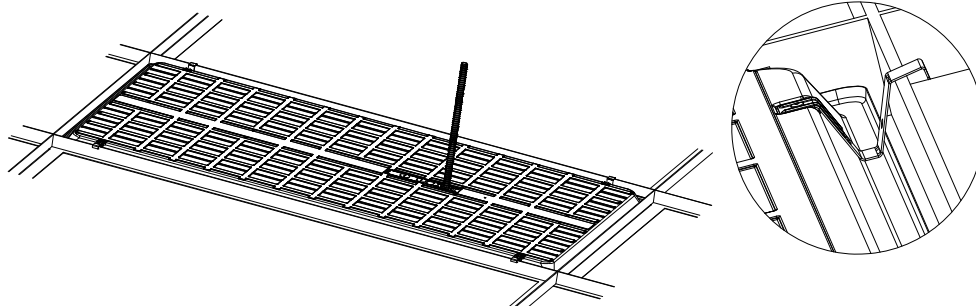

**fig. 4**

