



FEATURES AND SPECIFICATIONS

DIMENSIONS


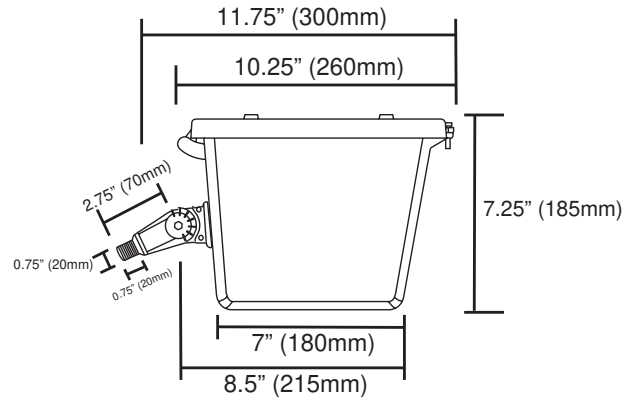


Overall Height: 7.25" (185mm)
Width: 9" (230mm)
Weight: 7.0 lbs (3.18kg)
Die Cast Aluminum Housing
Polycarbonate Lens
Low Maintenance
UL Listed for Wet Locations
IP 66 Rated
 This fixture is warranted to be free of defects in materials and workmanship for a period of 3 years from the date of the original purchase.

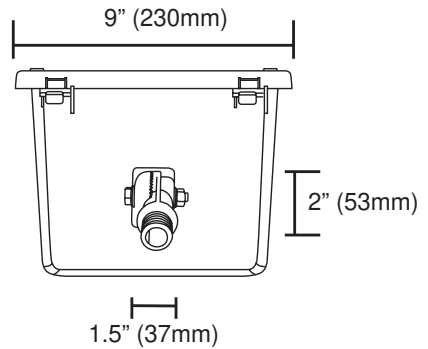


PHOTOMETRICS

MOUNTING DETAILS

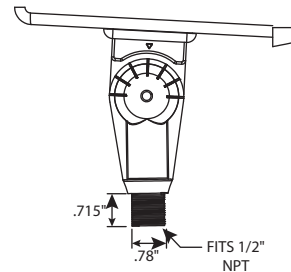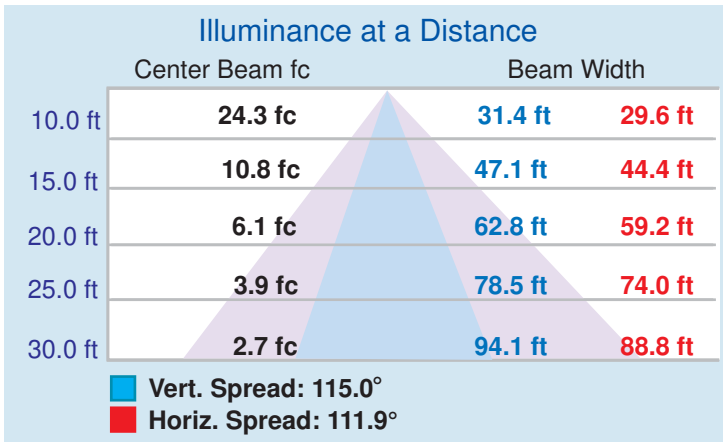

Wide-angle adjustable Kuckle Mount with angle indications of 30°, 60°, or 90°. Heavy Duty Kuckle Mount supports the floodlight that best suits your needs.



38651B
LED FLOOD LIGHT 58W/5K

LISTED

Wattage: 58W
 CCT: 5000K
 CRI: 80
 Avg Lumens: 6380
 Voltage: 120-277V
 Hertz: 50/60Hz
 Current: 0.5-0.22A

DAMAR®
805 N Carnation
Aurora, MO 65605
Made in China