



FEATURES AND SPECIFICATIONS





Overall Height: 7.0" (177mm)
Length: 16.5" (420mm)
Width: 16.5" (420mm)
Weight: 23.15 lbs. (10.5kg)
High-Powered LED array
Die Cast Aluminum Housing
Tempered Glass Lens
Low Maintenance
Operating Temperature -22°F to 122°F
Photocell Sensor Compatible
IP 65 Rated
This fixture is warranted to be free of defects in materials and workmanship for a period of 5 years from the date of the original purchase.

MOUNTING DETAILS

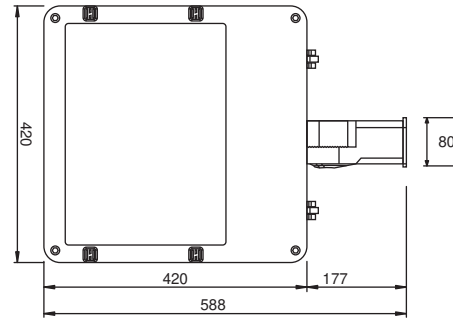

Slip Fitter

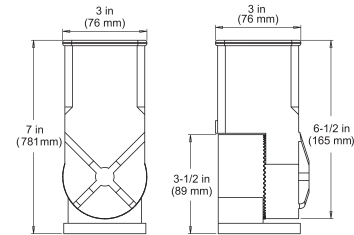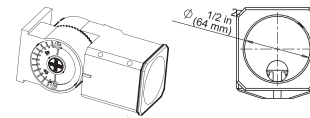



PHOTOMETRICS

Illuminance at a Distance

	Center Beam fc	Beam Width	
6.0 ft	35.3 fc	3.2 ft	5.2 ft
12.0 ft	8.8 fc	6.4 ft	10.5 ft
18.0 ft	3.9 fc	9.6 ft	15.7 ft
24.0 ft	2.2 fc	12.8 ft	20.9 ft
30.0 ft	1.4 fc	16.1 ft	26.2 ft

■ Vert. Spread: 30.0°
■ Horiz. Spread: 47.1°

WIRING DETAILS

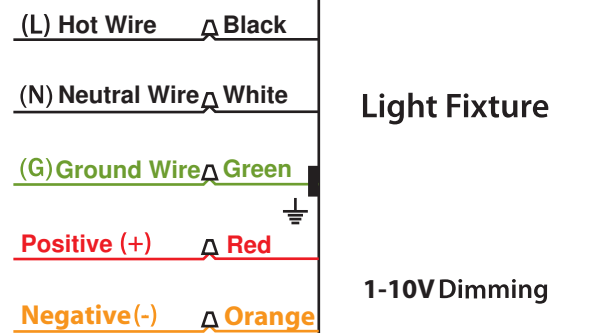

www.damar.com

38702A

DSB-110LED/4K



Wattage: 110W
 CCT: 4000K
 CRI : 70
 Avg Hours: 50,000
 Avg Lumens: 8800
 Voltage: 120-277V
 Hertz: 50/60Hz

DAMAR®

805 N Carnation
 Aurora, MO 65605