


# LED VAPORTIGHT 4FT



## WIRING DIAGRAM

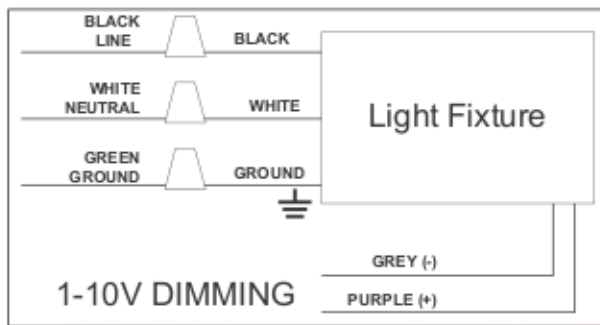

### Caution

- This fixture must be wired in accordance with the National Electrical Code and applicable local ordinance. Proper grounding is required to insure personal safety. Carefully observe grounding procedure under installation section.
- Make certain power is OFF before starting installation or attempting any maintenance. Risk of fire/electric shock. If not qualified, consult an electrician.
- Disconnect power at fuse or circuit breaker before installing or servicing
- Risk OF BURN--Disconnect power and allow fixture to cool before servicing.
- RISK OF PERSONAL INJURY--Fixture may become damaged and/or unstable if not installed properly. Tighten all fixture components to their recommended torque values.

## Specifications

Item	- 38707D
Model	- LED VAPORTIGHT 52W/4K/4FT G1
Bulb Type	- LED
Input Voltage	- 100-277 VAC 50/60Hz
Dimmable	- Yes (1-10V)
Watts	- 52
Beamspread	- 110°
Height	- 3.4 Inches (85.2 mm)
Color Temp	- 4,000 K
CRI	- 80
Lumen	- 6,760
Length	- 47.25" (1200 mm)
Width	- 4.9" (123.6 mm)
Average Life Hours	- 50,000
Weight	- 4.9lbs (2.2kg)
Location Rating	- Suitable for Wet Locations
Ambient Operating Temperature	- -40°F to 122°F (-40°C to 50°C)

### Illuminance at a Distance

	Center Beam fc	Beam Width	
10.0 ft	20.4 fc	27.8 ft	42.3 ft
15.0 ft	9.1 fc	41.7 ft	63.4 ft
20.0 ft	5.1 fc	55.6 ft	84.6 ft
25.0 ft	3.3 fc	69.6 ft	105.7 ft
30.0 ft	2.3 fc	83.5 ft	126.9 ft

■ Vert. Spread: 108.6°  
■ Horiz. Spread: 129.4°

